


## PRODUCT INFORMATION 300 Series Top Plate Castor

**Material:** Zinc plated swivel bracket with top plate fitting. Wheel with grey thermoplastic polyurethane tread on nylon centre, electrically conductive.

Part number:	274700
Wheel diameter (D):	160mm
Tread width (T2):	40mm
Tread hardness:	94° Shore A
Electrical conductivity:	≤10⁴Ω
Wheel bearing:	Additional sealed single ball bearing
Top plate size (AxB):	140x110mm
Fixing hole spacing (axb):	105x80mm
Fixing hole size (d):	11mm
Offset (F):	57mm
Overall height (H):	193mm
Load capacity 3km/h:	260kg
Rolling resistance:	Very good
Operating noise:	Good
Floor preservation:	Good



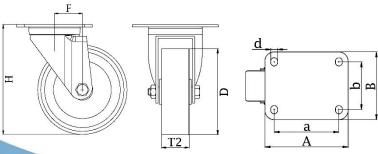

Unit A1 - A2 Southcity Business Centre Whitestown Way Tallaght Dublin D24 HT95 Ireland

Telephone: (353) 1 452 0482 Email: info@parnells.eu

www.parnells.eu